

# Work Order ID 77417

**\*77417\***

Page 1

Tuesday, December 06, 2011 1:55:53 PM

Item ID: D3684-041 Accept **\*N9000040100\*** Setup Start **\*NS1\***  
 Revision ID: Stop **\*NS2\***  
 Item Name: TRIPOD MOUNT ASSEMBLY  
 Start Date: 12/6/2011 Start Qty: 1.00 **\*1\*** Cust Item ID:  
 Required Date: 12/9/2011 Req'd Qty: 1.00 **\*1\*** Customer:  
 Reference:

Approvals: Process Plan: mf Date: 11-12-06 Tooling: \_\_\_\_\_ Date: \_\_\_\_\_ Run Start **\*NR1\***  
 QC: \_\_\_\_\_ Date: \_\_\_\_\_ SPC (Y/N): \_\_\_\_\_ Date: \_\_\_\_\_ Stop **\*NR2\***

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
<b>Draw Nbr</b>	<b>Revision Nbr</b>								
D3684	Rev D								
100	Pick Kit	0.00							
<b>*100*</b>									
Packaging	Memo	0.00							
Packaging									
110	QC4- 100% Inspect kits for completeness	0.00							
<b>*110*</b>									
QC	Memo	0.00							
Quality Control									
120	Identify as per dwg & Stock Location: _____	0.00							
<b>*120*</b>									
Packaging	Memo <u>Shor</u>	0.00							
Packaging									

11/12/08 SP

41

11/12/08

**Work Order ID 77417****\*77417\***


Page 2

Tuesday, December 06, 2011 1:55:53 PM

Item ID: D3684-041      Accept      \*N900040100\*      Setup Start \*NS1\*  
Revision ID:      Stop \*NS2\*  
Item Name: TRIPOD MOUNT ASSEMBLY  
Start Date: 12/6/2011      Start Qty: 1.00      \*1\*      Cust Item ID:  
Required Date: 12/9/2011      Req'd Qty: 1.00      \*1\*      Customer:  
Reference:

Approvals:      Process Plan:      Date:      Tooling:      Date:      Run Start \*NR1\*  
QC:      Date:      SPC (Y/N):      Date:      Stop \*NR2\*

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
130	QC21- Final Inspection - Work Order Release	0.00							
*130*									
QC	Memo	0.00							
Quality Control									

11/12/8 

MF  
11-12-08

# Picklist Print

Tuesday, December 06, 2011 1:55:53 PM

Page 1

Work Order ID: 77417

Parent Item: D3684-041

Parent Item Name: TRIPOD MOUNT ASSEMBLY

Start Date: 12/6/2011

Required Date: 12/9/2011


Start Qty: 1.00

Required Qty: 1.00

Comments: IPP Rev:A new issue 08-02-12 DD verified by:LL  
 IPP Rev:B As per Rev B 09-01-07 JLM Verified By:EC  
 03-16 JLM VERIFIED BY:EC  
 IPP Rev:C Added sealant note as per Rev C 09-01-20 JLM Verified By:DD  
 IPP REV:C AS PER REV D 10-

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
AN3C12A Bolts		Purchased	No			110	Each	90.0000	2	2			
				<u>Location</u>		<u>Loc Qty</u>		<u>Loc Code</u>					
				ST351		90							
				117514		4							
				118112		5							
				118422		17							
				118451		22							
				119510		42							
D3684-043 MOUNT ASSEMBLY		Manufactured	No			110	Each	0.0000	1	1			
D3684-045 LEG ASSEMBLY		Manufactured	No			110	Each	0.0000	1	1			
D3692-1 SPACER		Manufactured	No			110	Each	141.0000	4	4			
				<u>Location</u>		<u>Loc Qty</u>		<u>Loc Code</u>					
				ST075		141							
				51467		41							
				73232		100							
MS21043-3 Nut		Purchased	No			110	Each	856.0000	2	2			
				<u>Location</u>		<u>Loc Qty</u>		<u>Loc Code</u>					
				FG		72							
				103691		72							
				ST301		784							
				118077		1							
				118614		449							
				118686		104							
				119758		230							


ITEM	QTY -041	PART NUMBER	DESCRIPTION
1	X	D3684-041	TRIPOD MOUNT ASSEMBLY
2	1	D3684-043	MOUNT ASSEMBLY
3	1	D3684-045	INBOARD LEG ASSEMBLY
4	4	D3692-1	SPACER
5	2	AN3C-12A	BOLT
6	2	MS21043-3	NUT

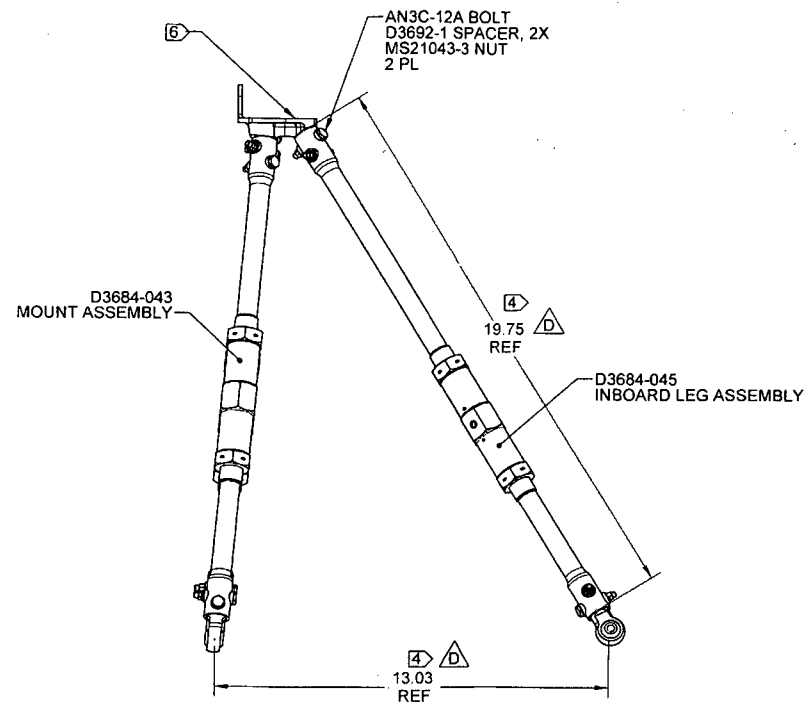

**D3684-041 TRIPOD MOUNT ASSY**

**NOTES:**

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: NONE
- 4) DIMENSIONS SHOWN ARE WHEN D3688-1/-3/-5 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVES
- 5) WEIGHT: 9.9 lbs
- 6) ASSEMBLE D3684-045 WITH D3684-043 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT
- 7) ASSEMBLY SHOWN FOR REF ONLY, -041 IS PACKAGED UNASSEMBLED

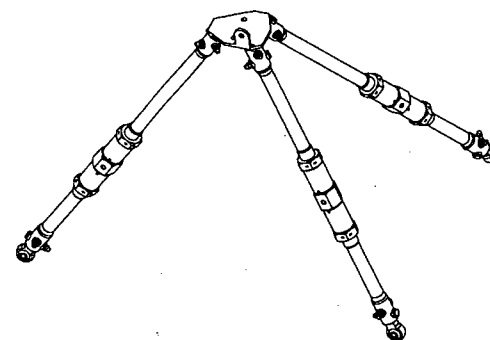

# 77417

**RELEASED**  
2010-03-15  
*MP*

D	13.03 WAS 13.10 (ZN B5-1); 19.75 WAS 19.87 (ZN C4-1); 19.40 WAS 19.52 (ZN C6-2); 17.15 WAS 17.27 (ZN C4-2); 19.85 WAS 20.24 (ZN B5-2); 20.96 WAS 21.09 (ZN C5-3); 20.62 WAS 20.74 (ZN C5-4); 18.37 WAS 18.49 (ZN C6-5)	RF	10.03.03
C	NOW ASSEMBLED USING SEALANT (ZN A8-1, D6-1, A8-2, D4-2, A8-3, B4-3, A8-4, B4-4, A8-5, B5-5); ASSEMBLY NOW SHOWN FOR REF ONLY (ZN A8-1, A4-1)	RF	08.12.15
B	19.52 WAS 19.50 (ZN C6-2); 9.20 WAS 9.70 (ZN C6-2); 20.74 WAS 21.24 (ZN C4-1); 6.95 WAS 6.85 (ZN D5-5); MODIFIED PER PROTOTYPE INSTALLATION; REFORMATTED TO CURRENT DWG STANDARDS	RF	08.11.24
A	NEW ISSUE	RF	08.05.22
REV.	DESCRIPTION	BY	DATE
DESIGN	RF	<b>DART AEROSPACE LTD</b> HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED	<i>[Signature]</i>	DRAWING NO.	REV. D
MFG. APPR.	<i>[Signature]</i>	D3684	SHEET 1 OF 5
APPROVED	<i>[Signature]</i>	TITLE	SCALE
DE APPR.	<i>[Signature]</i>	TRIPOD MOUNT ASSY	NTS
DATE	10.03.03	<small>COPYRIGHT © 2008 BY DART AEROSPACE LTD  THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR REPRODUCED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD</small>	

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector


Part No: \_\_\_\_\_ PAR #: \_\_\_\_\_ Fault Category: \_\_\_\_\_ NCR: Yes No DQA: \_\_\_\_\_ Date: \_\_\_\_\_

Resolution: \_\_\_\_\_ Disposition: \_\_\_\_\_ QA: N/C Closed: \_\_\_\_\_ Date: \_\_\_\_\_

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

ITEM	QTY -043	PART NUMBER	DESCRIPTION
1	X	D3684-043	MOUNT ASSEMBLY
2	1	D3687-1	MOUNT
3	1	D3684-047	FWD LEG ASSY
4	1	D3684-049	AFT LEG ASSY
5	8	D3692-1	SPACER
6	4	AN3C-12A	BOLT
7	4	MS21043-3	NUT

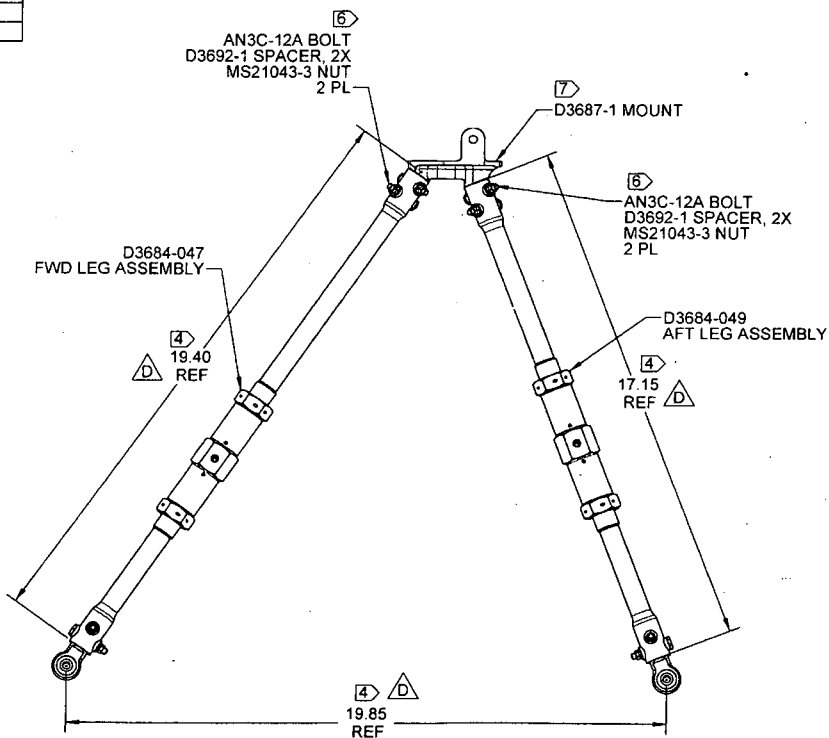

**D3684-043 MOUNT ASSEMBLY**

**NOTES:**

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: IDENTIFY WITH DART ASSEMBLY P/N D3684-043 USING FINE POINT PERMANENT INK MARKER
- 4) DIMENSIONS SHOWN ARE WHEN D3688-1/-3 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVES
- 5) WEIGHT: 6.6 lbs
- 6) TORQUE FASTENERS TO 20-25 in-lbs
- 7) ASSEMBLE D3684-047 & D3684-049 WITH D3687-1 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

DESIGN	RF	<b>DART AEROSPACE LTD</b>	
DRAWN	RF	HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. D
MFG. APPR.		D3684	SHEET 2 OF 5
APPROVED		TITLE	SCALE
DE APPR.		TRIPOD MOUNT ASSY	NTS
DATE	10.03.03	COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD	

#77417

RELEASED  
2010-03-15

# Dart Aerospace Ltd

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector


Part No: \_\_\_\_\_ PAR #: \_\_\_\_\_ Fault Category: \_\_\_\_\_ NCR: Yes No DQA: \_\_\_\_\_ Date: \_\_\_\_\_

Resolution: \_\_\_\_\_ Disposition: \_\_\_\_\_ QA: N/C Closed: \_\_\_\_\_ Date: \_\_\_\_\_

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

**NOTE:** Date & initial all entries

ITEM	QTY -045	PART NUMBER	DESCRIPTION
1	X	D3684-045	INBOARD LEG ASSEMBLY
2	1	D3688-5	STUD
3	1	D3689-1	SLEEVE
4	1	D3691-1	STUD
5	4	D3692-1	SPACER
6	1	D3693-1	ROD END BEARING
7	2	AN3C-12A	BOLT
8	2	MS21043-3	NUT
9	1	NAS509L-12C	NUT
10	1	NAS509-12C	NUT

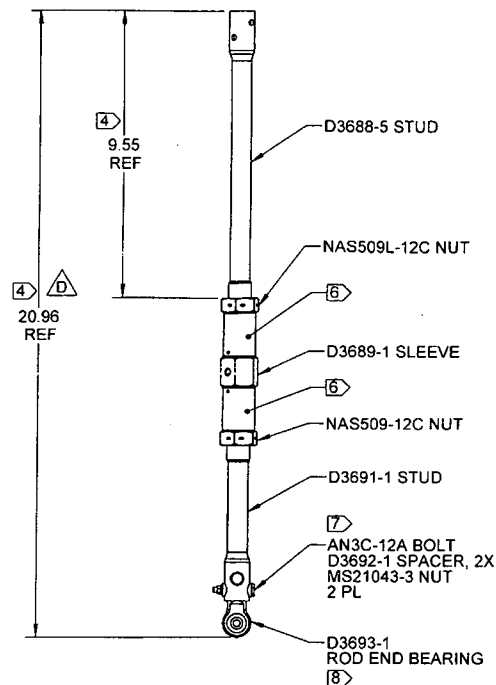

#77417

**D3684-045 INBOARD LEG ASSEMBLY**

**RELEASED**  
2010-03-15

**NOTES:**

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: IDENTIFY WITH DART ASSEMBLY P/N D3684-045 USING FINE POINT PERMANENT INK MARKER
- 4) DIMENSION SHOWN IS WHEN D3688-5 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVE
- 5) WEIGHT: 3.1 lbs
- 6) USE TECTYL 502C CLASS I, MIL-PRF-16173E GRADE 2 OR EQUIVALENT ANTI-SEIZE COMPOUND ON THREAD
- 7) TORQUE FASTENERS TO 20-25 in-lbs
- 8) ASSEMBLE D3693-1 WITH D3691-1 USING SIKAFLEX-241/291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

DESIGN	RF	<b>DART AEROSPACE LTD</b>	
DRAWN	RF	HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. D
MFG. APPR.		<b>D3684</b>	SHEET 3 OF 5
APPROVED		TITLE	SCALE
DE APPR.		<b>TRIPOD MOUNT ASSY</b>	NTS
DATE	10.03.03	COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL. IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	



W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector


Part No: \_\_\_\_\_ PAR #: \_\_\_\_\_ Fault Category: \_\_\_\_\_ NCR: Yes No DQA: \_\_\_\_\_ Date: \_\_\_\_\_

Resolution: \_\_\_\_\_ Disposition: \_\_\_\_\_ QA: N/C Closed: \_\_\_\_\_ Date: \_\_\_\_\_

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

ITEM	QTY -047	PART NUMBER	DESCRIPTION
1	X	D3684-047	FWD LEG ASSEMBLY
2	1	D3688-1	STUD
3	1	D3689-1	SLEEVE
4	1	D3691-1	STUD
5	4	D3692-1	SPACER
6	1	D3693-1	ROD END BEARING
7	2	AN3C-12A	BOLT
8	2	MS21043-3	NUT
9	1	NAS509L-12C	NUT
10	1	NAS509-12C	NUT

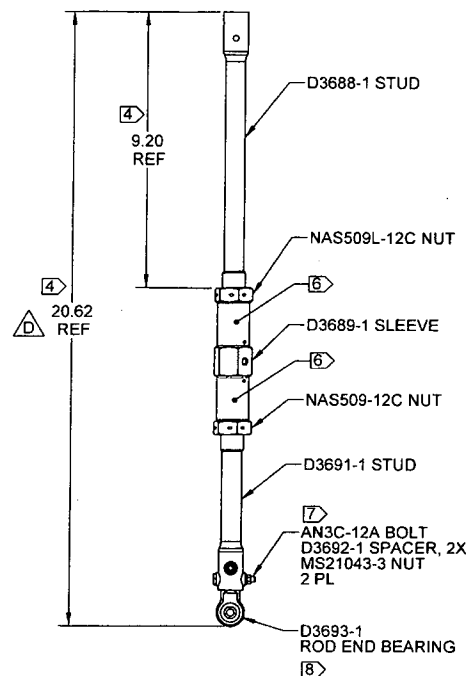

**D3684-047 FWD LEG ASSEMBLY**

**NOTES:**

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: NONE
- 4) DIMENSION SHOWN IS WHEN D3688-1 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVE
- 5) WEIGHT: 3.09 lbs
- 6) USE TECTYL 502C CLASS I, MIL-PRF-16173E GRADE 2 OR EQUIVALENT ANTI-SEIZE COMPOUND ON THREAD
- 7) TORQUE FASTENERS TO 20-25 in-lbs
- 8) ASSEMBLE D3693-1 WITH D3691-1 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

DESIGN	RF	<b>DART AEROSPACE LTD</b> HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF	DRAWING NO.	REV. D
CHECKED	RF	<b>D3684</b>	SHEET 4 OF 5
MFG. APPR.		TITLE	SCALE
APPROVED		<b>TRIPOD MOUNT ASSY</b>	NTS
DE APPR.		COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	
DATE	10.03.03		

**RELEASED**  
2010-03-15

#77417

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector


Part No: \_\_\_\_\_ PAR #: \_\_\_\_\_ Fault Category: \_\_\_\_\_ NCR: Yes No DQA: \_\_\_\_\_ Date: \_\_\_\_\_

Resolution: \_\_\_\_\_ Disposition: \_\_\_\_\_ QA: N/C Closed: \_\_\_\_\_ Date: \_\_\_\_\_

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

**NOTE:** Date & initial all entries

ITEM	QTY -049	PART NUMBER	DESCRIPTION
1	X	D3684-049	AFT LEG ASSEMBLY
2	1	D3688-3	STUD
3	1	D3689-1	SLEEVE
4	1	D3691-1	STUD
5	4	D3692-1	SPACER
6	1	D3693-1	ROD END BEARING
7	2	AN3C-12A	BOLT
8	2	MS21043-3	NUT
9	1	NAS509L-12C	NUT
10	1	NAS509-12C	NUT

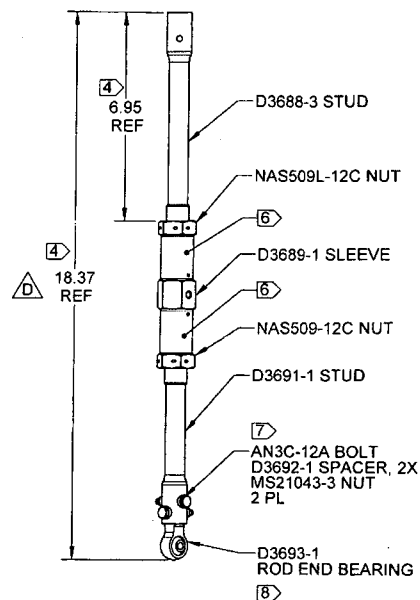

#77417

**D3684-049 AFT LEG ASSEMBLY**

**RELEASED**  
2010-03-15

**NOTES:**

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: NONE
- 4) DIMENSION SHOWN IS WHEN D3688-3 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVE
- 5) WEIGHT: 2.86 lbs
- 6) USE TECTYL 502C CLASS I, MIL-PRF-16173E GRADE 2 OR EQUIVALENT ANTI-SEIZE COMPOUND ON THREAD
- 7) TORQUE FASTENERS TO 20-25 in-lbs
- 8) ASSEMBLE D3693-1 WITH D3691-1 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

DESIGN	RF	<b>DART AEROSPACE LTD</b> HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED	RF	DRAWING NO. <b>D3684</b>	REV. D
MFG. APPR.			SHEET 5 OF 5
APPROVED		TITLE	SCALE
DE APPR.		<b>TRIPOD MOUNT ASSY</b>	NTS
DATE	10.03.03	COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL. IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: \_\_\_\_\_ PAR #: \_\_\_\_\_ Fault Category: \_\_\_\_\_ NCR: Yes No DQA: \_\_\_\_\_ Date: \_\_\_\_\_

Resolution: \_\_\_\_\_ Disposition: \_\_\_\_\_ QA: N/C Closed: \_\_\_\_\_ Date: \_\_\_\_\_

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries